



**HIGH COEFFICIENT OF  
PERFORMANCE (COP) UP  
TO 4.61**



**OPERATES EFFICIENTLY IN  
TEMPERATURES AS LOW AS  
23 °F**



**MODULAR DESIGN  
CONCEPT**




**LOW GLOBAL  
WARMING POTENTIAL  
(GWP) REFRIGERANT  
(R5 13A)**



## **EASE OF INSTALLATION**

- The Veritus heat pump water heater has a modular design simplifying size selection and transport.
- Single units can be installed for smaller hot water output or manifolded together for larger application demands.
- Further flexibility includes installation outside of the facility, such as on a rooftop, while keeping ancillary equipment like storage tanks located inside the mechanical room.

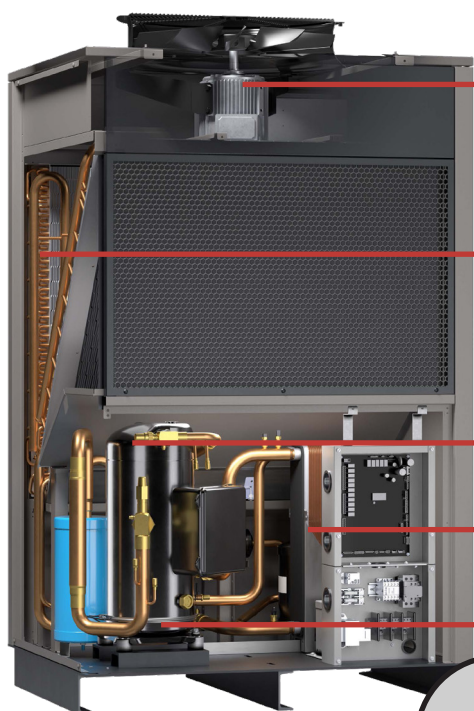


**1 EVAPORATOR FAN**  
ECM AND VARIABLE SPEED.

**2 EVAPORATOR**  
COPPER TUBING WITH ALUMINUM FINS

**3 COMPRESSOR**  
RELIABLE SCROLL TECHNOLOGY

**4 CONDENSER**  
STAINLESS STEEL, DOUBLE-WALL

**5 REVERSING VALVE**  
QUICK DEFROST



**Shamrock  
Sales, Inc.**

4940 Fox St.  
Denver, CO 80216

(303) 399-9181

[quotes@shamrocksalesinc.com](mailto:quotes@shamrocksalesinc.com)  
[shamrocksalesinc.com](http://shamrocksalesinc.com)