




3450 Combination Boiler Feed Valve & Backflow Preventer

The integral design of the **Taco® 3450 combi-valve** combines a cartridge style backflow preventer with a pressure regulating cartridge style boiler feed valve into a unique one-piece body configuration. The Taco 3450 combination dual check backflow with atmospheric vent and boiler feed valve with purge auto-reset, dial-in pressure setting and adjustable indicator sets a new standard for performance and serviceability.

FEATURES & BENEFITS

- Auto reset from fast-fill
- ASSE 1081-2014
- Simple pressure adjustment
- Large adjustment range, 10-50 psi
- Serviceable cartridge for the backflow and feed valves
- Adjustable 360 view of pressure indicator
- Serviceable without draining the system
- One-piece body construction
- Stainless steel strainer

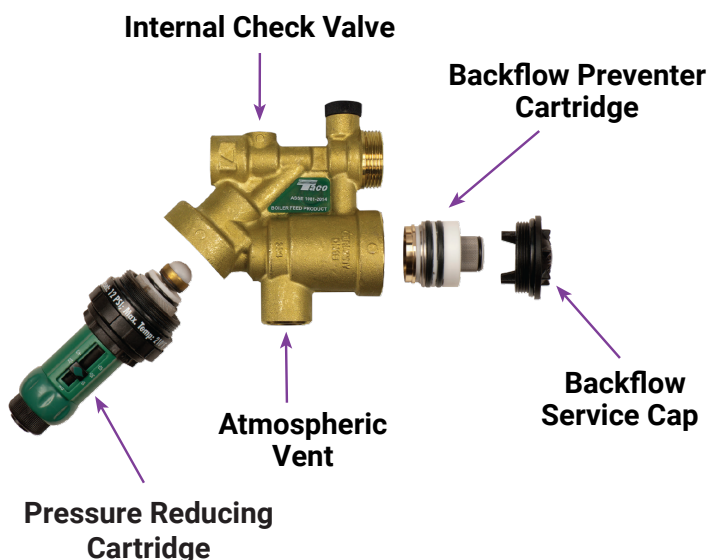

Performance

Max. Inlet Pressure.....	150 psi (10.3 Bar)
Min. Delta P Inlet to Outlet.....	15 psi (1 Bar)
Recommended Setting Range.....	10-50 psi +/-3 psi (.7-3.4 bar)
Factory Setting.....	12psi (.8)
Adjustment Capability.....	8.5 - 65 psi (.6-4.5 bar)
Max. Flow Rate.....	25 gpm (8 ft / sec) 95 l/m
Max. Temperature.....	210°F (99°C)

Part#	Description
3450	1/2" NPT x 1/2" Union Sweat
3450-T	1/2" NPT x 1/2" Union NPT
3450-H	1/2" NPT x 1/2" Union Press



4940 Fox St.
Denver, CO 80216

(303) 399-9181
quotes@shamrocksalesinc.com
shamrocksalesinc.com