




**NO ONE BRINGS IT ALL TOGETHER
LIKE LOCHINVAR**

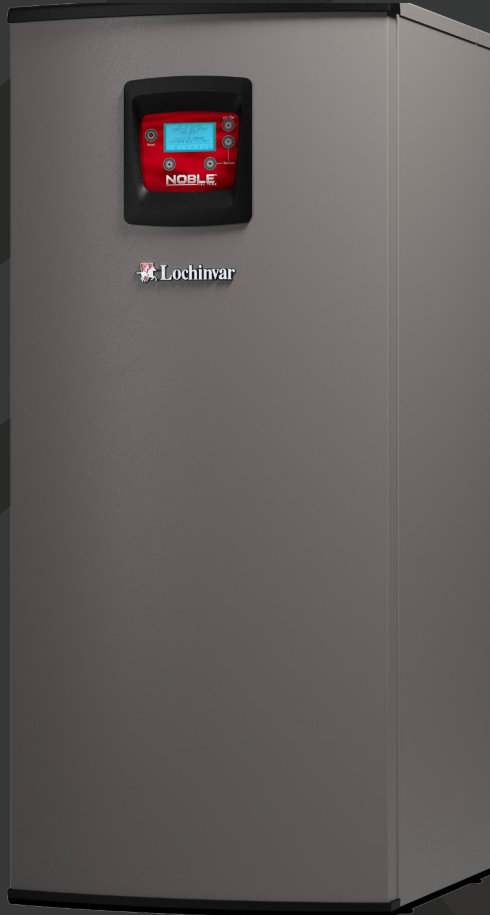

NOBLE[®]
FIRE TUBE

**A GAME-CHANGER IN
COMBI WATER HEATING**

Removing the front panel provides easy access to the combustion system, control panel and key components. This simple-to-install-and-service combi boiler is top of its class.

The unique fire tube heat exchanger design is what enables NOBLE to produce the results users deserve and have come to expect from Lochinvar.

1 ADAPTER-FREE FLUE CONNECTION

Multi-material connector allows either PVC, CPVC, polypropylene or stainless steel connection directly to the appliance without adapters. NOBLE also has a built-in combustion analyzer port.

2 DIRECT VENTING UP TO 100 FEET

Offers five venting options for tremendous installation flexibility. It permits direct-vent air intake and exhaust runs up to 100 equivalent feet using either PVC, CPVC, polypropylene or AL29-4C stainless steel vent pipe.

3 ADVANCED NEGATIVE REGULATION TECHNOLOGY

Safely and reliably operates with supply gas pressure as low as 4 inches water column. Its negative regulation (neg/reg) technology eliminates mechanical dampers as it automatically adjusts fan speed to ensure the correct volume and mix of fuel and air throughout the firing range.

**4 INNOVATIVE FIRE-TUBE
HEAT EXCHANGER**

The fire tube design can produce a higher heat transfer coefficient than traditional fire tubes

**5 BRAZED PLATE
HEAT EXCHANGER**

Stainless steel heat exchanger that quickly transfers heat from the boiler system to the domestic water satisfying DHW load.

**6 WATER CONNECTIONS FOR
EASY INSTALLATION**

Top connections on the floor model and NPT on the wall model make for simplified installation no matter the application.



**Shamrock
Sales, Inc.**

4940 Fox St.
Denver, CO 80216

(303) 399-9181
quotes@shamrocksalesinc.com
shamrocksalesinc.com